

# AS-200/200L

**NAKAMURA-TOME**  
PRECISION INDUSTRY CO.,LTD.

Your First Step  
in Multitasking

Innovative  
Technology

~ Creating new values ~


AS-200  
AS-200L


This compact single-Turret machine with an 8-inch chuck and high cutting capabilities, can handle a wide range of applications from turning to milling.

This multitasking machine is simple, easy to use, and cost-effective.



- Space-saving multitasking machine with Y-axis & Milling function(standard)
- With Y-axis! Stroke: 82mm(±41mm)  
With Milling function: 5.5/3.7kW,  
Spindle speed: 6,000min<sup>-1</sup>
- X-axis: 24m/min, Z-axis: 36m/min, Y-axis: 6m/min
- Turret: Dodecagonal drum turret(max.24 stations)  
or 15 stations
- Number of milling tool (Dodecagonal drum turret): 12  
Number of milling tool (15 stations turret): 15
- Floor space 1,655mm×1,665mm(AS-200)  
2,716mm×1,805mm(AS-200L)

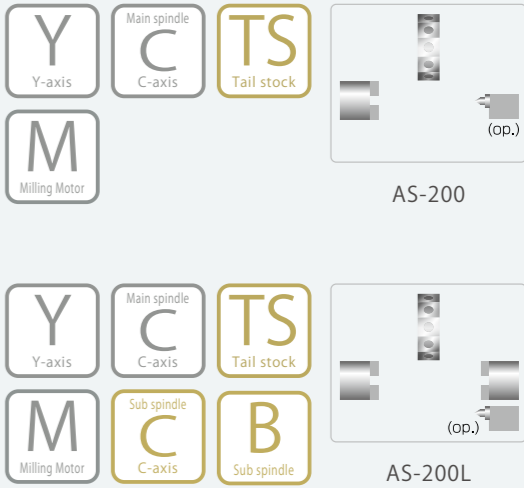

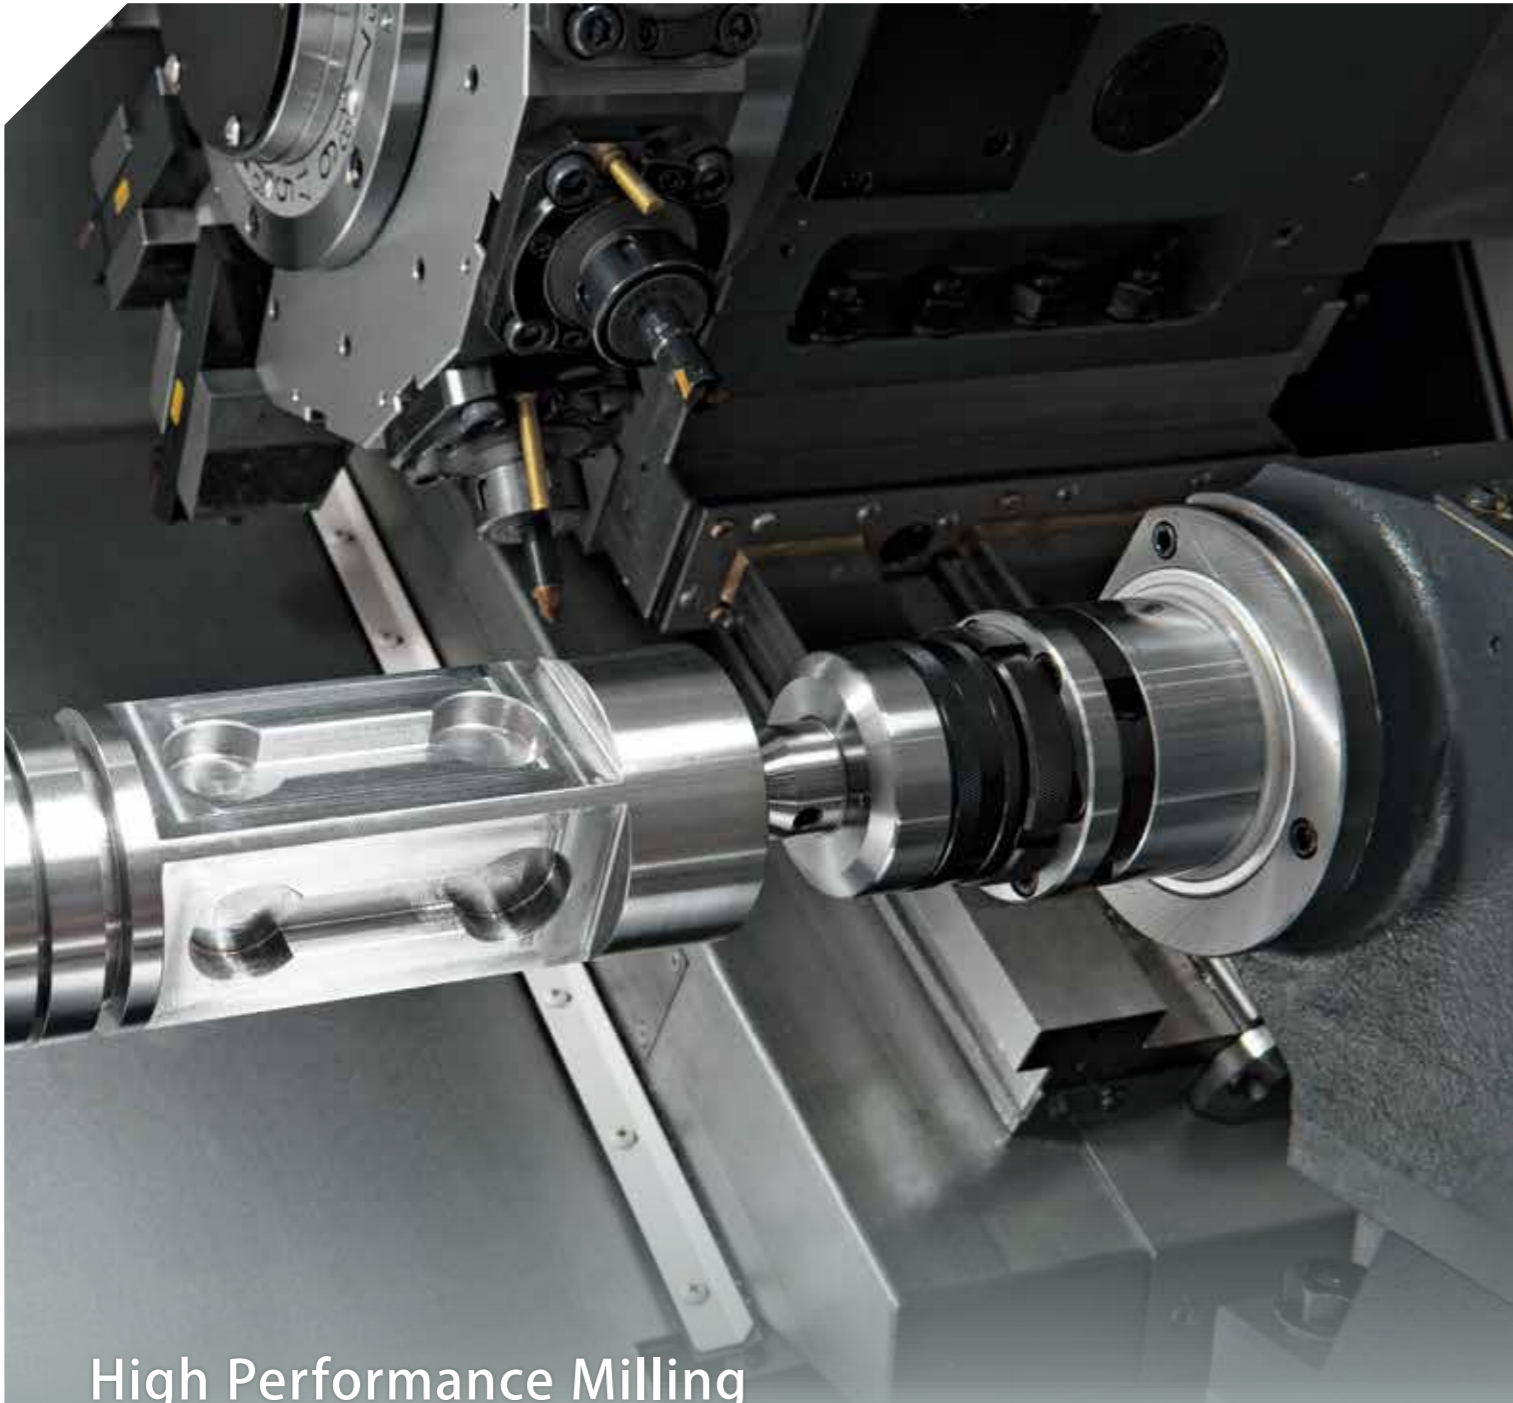


## High Performance Milling and Y-axis

Powerful milling drive, high-speed high-accuracy C-axis and 82mm-stroke Y-axis ensure production of finished parts, abolishing secondary operations, such as deburring, milling and drilling, as well as eliminating re-positioning fixtures.

## Highest Machining Capabilities in its Class AS-200

### Milling

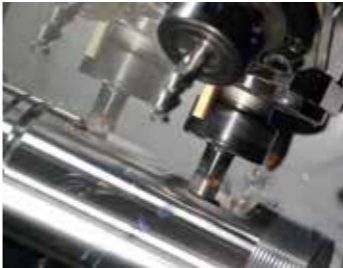

- Tool diameter 16mm
- Depth 5mm
- Feed 0.2mm/rev
- Cutting Speed 200m/min
- Spindle Speed 4,000min<sup>-1</sup>

### Turning



- Machined diameter 72mm
- Depth 4mm
- Feed 0.35mm/rev
- Cutting Speed 180m/min
- Spindle Speed 796min<sup>-1</sup>

### Drilling



- Tool diameter 50mm
- Feed 0.12mm/rev
- Cutting Speed 150m/min
- Spindle Speed 955min<sup>-1</sup>

## Turning and Milling with full power! AS-200L

### Milling



- Tool diameter 16mm
- Depth 5mm
- Feed 0.2mm/rev
- Cutting Speed 200m/min
- Spindle Speed 4,000min<sup>-1</sup>

### Turning




- Machined diameter 72mm
- Depth 3mm
- Feed 0.35mm/rev
- Cutting Speed 180m/min
- Spindle Speed 1,146min<sup>-1</sup>

Stable Accuracy Ensured  
AS-200




■ L-spindle

Standard	
Bar capacity	φ 65mm
Spindle motor	15/11kW 4,500min <sup>-1</sup>
Option	
Bar capacity	φ 71mm
Option	
Spindle motor	15/11kW (High torque) 4,500min <sup>-1</sup>

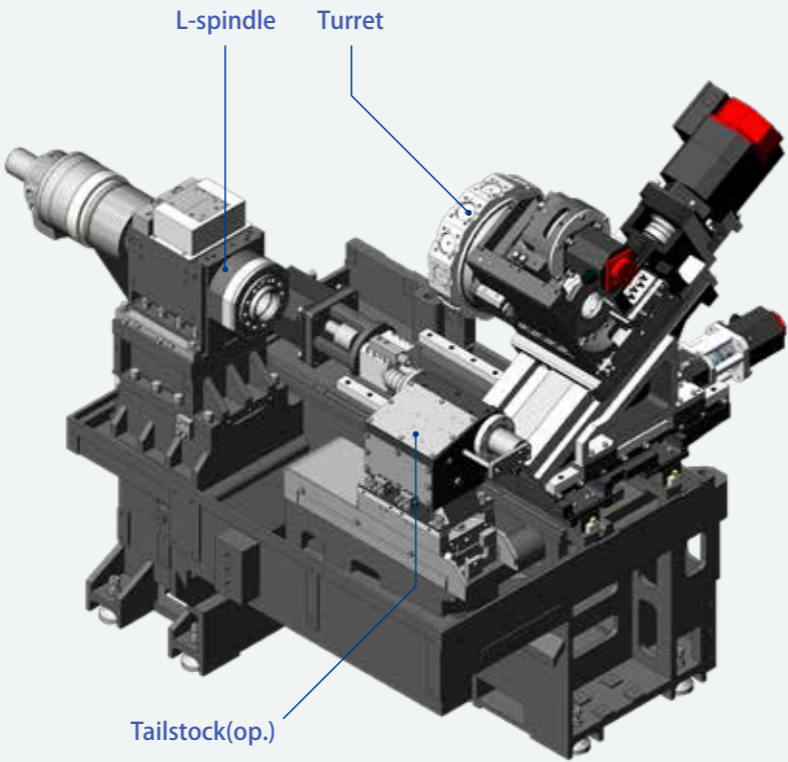


■ Tailstock

Option	
Driving system	Manual
Quill taper	MT-4(Rotating center)
Quill diameter	φ 70mm
Quill stroke	80mm

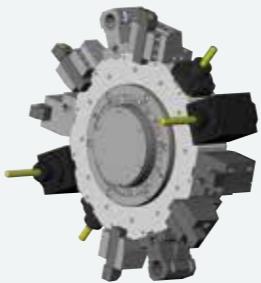

12 / 24 stations turret


Turret type : Dodecagonal  
Number of tools : 24  
Number of indexing pos. : 24  
Number of milling stations: 12  
Milling spindle speed : 6,000min<sup>-1</sup>  
O.D. turning tools : 20/25mm  
I.D. Boring : dia.32mm  
Collet diameter of driven tools : φ1-16mm  
Tool swing diameter : 620mm  
Max. turning diameter : 290mm

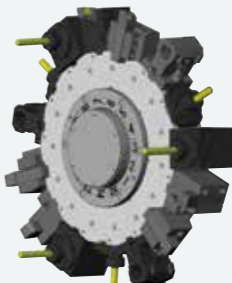


15 stations turret

Turret type : 15-station turret  
Number of tools : 15  
Number of indexing pos. : 15  
Number of milling stations : 15  
Milling spindle speed : 6,000min<sup>-1</sup>  
O.D. turning tools : 20/25mm  
I.D. Boring : dia.32mm  
Collet diameter of driven tools : φ1-16mm  
Tool swing diameter : 615mm  
Max. turning diameter : 280mm


Y-axis slide travel  
± 41mm

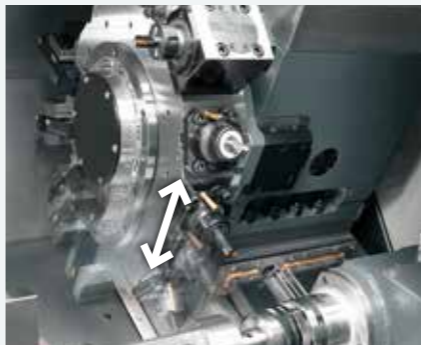

Compact!  
The smallest floor space in its class

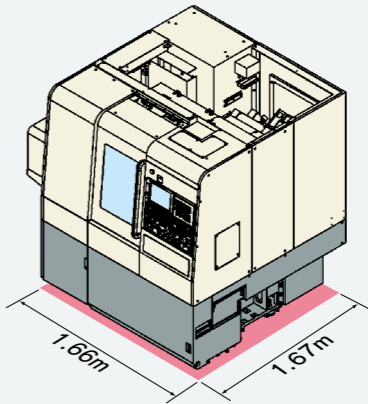

Operator Friendly,  
Front distance to-spindle 400mm

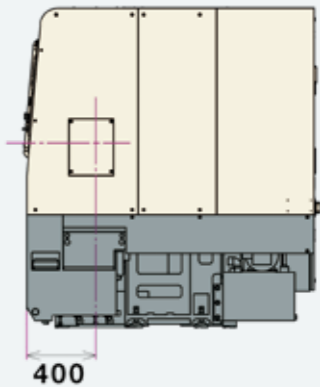

Larger window ensures better visibility



Eco-friendly: Energy Saving Functions

- 1 Hyd. and Lub. pump motor stop except during auto operation.
- 2 Servo power off except during auto operation
- 3 Power control box cooling fan stops except during auto operation.
- 4 Motor fan stops except during auto operation
- 5 Energy saving mode for each axes acc. / dec.
- 6 Standard chip conveyor intermittent timer.(op.)
- 7 Work light off function
- 8 LCD back light off function
- 9 Inverter type Hyd. Pump unit (op.)

Stable Accuracy Ensured  
AS-200L

■ L-spindle

Standard

Bar capacity  $\phi$  65mm  
Spindle motor 15/11kW  
4,500min<sup>-1</sup>

Option

Bar capacity  $\phi$  71mm


Option

Spindle motor 15/11kW  
(High torque)  
4,500min<sup>-1</sup>

■ Sub-spindle

Option


Bar capacity  $\phi$  42mm  
Spindle motor 7.5/5.5kW  
6,000min<sup>-1</sup>

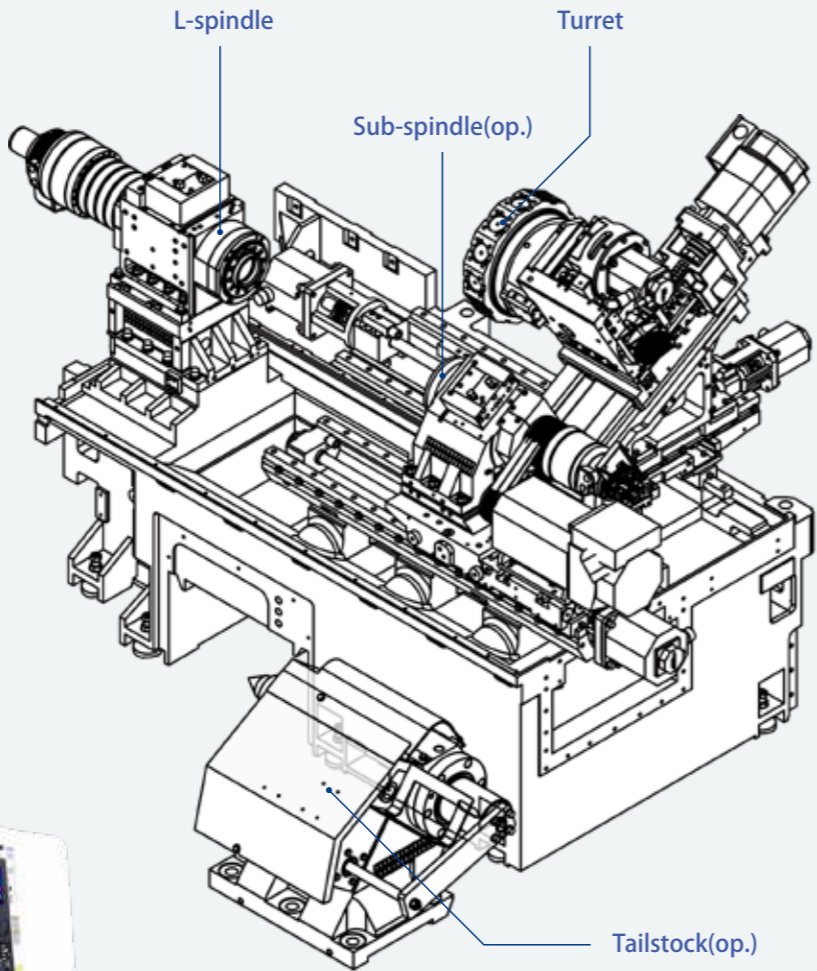

■ Tailstock

Option

Driving system Manual  
Quill taper MT-4(Rotating center)  
Quill diameter  $\phi$  80mm  
Quill stroke 80mm

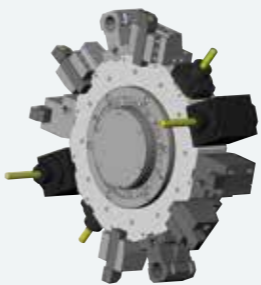

12 / 24 stations turret


Turret type : Dodecagonal  
Number of tools : 24  
Number of indexing pos. : 24  
Number of milling stations : 12  
Milling spindle speed : 6,000min<sup>-1</sup>  
O.D. turning tools : 20/25mm  
I.D. Boring : dia.32mm  
Collet diameter of driven tools :  $\phi$ 1-16mm  
Tool swing diameter : 620mm  
Max. turning diameter : 290mm



15 stations turret

Turret type : 15-station turret  
Number of tools : 15  
Number of indexing pos. : 15  
Number of milling stations : 15  
Milling spindle speed : 6,000min<sup>-1</sup>  
O.D. turning tools : 20/25mm  
I.D. Boring : dia.32mm  
Collet diameter of driven tools :  $\phi$ 1-16mm  
Tool swing diameter : 615mm  
Max. turning diameter : 280mm

Y-axis slide travel  
 $\pm$  41mm

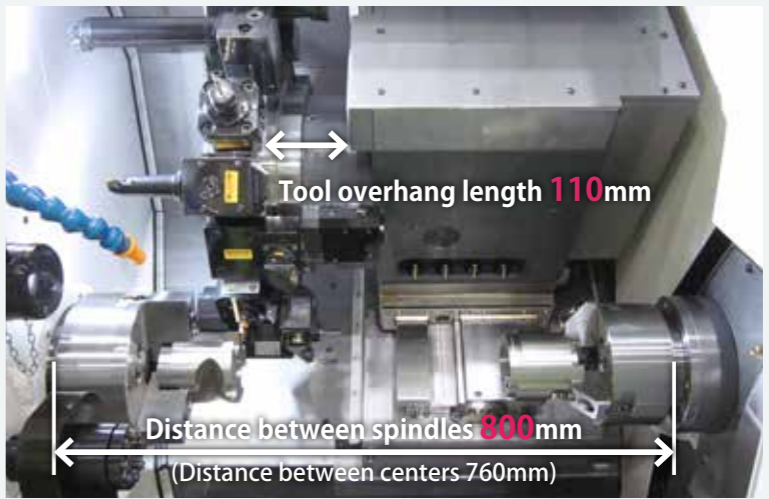

Larger window ensures better visibility



Eco-friendly: Energy Saving Functions

- 1 Hyd. and Lub. pump motor stop except during auto operation.
- 2 Servo power off except during auto operation
- 3 Power control box cooling fan stops except during auto operation.
- 4 Motor fan stops except during auto operation
- 5 Energy saving mode for each axes acc. / dec.
- 6 Standard chip conveyor intermittent timer.(op.)
- 7 Work light off function
- 8 LCD back light off function
- 9 Inverter type Hyd. Pump unit (op.)

## FANUC 0i-TF Plus with iHMI 15 inch touch screen control



### ■ Tool Manager

Tooling information such as tool life and geometry value can be managed.




### ■ Maintenance Manager

Maintenance information such as the life of consumable parts can be managed, and each item can be customized.



### ■ Servo Viewer

By testing a measurement, the load, position, and speed of each axis are read and visualized with a waveform.

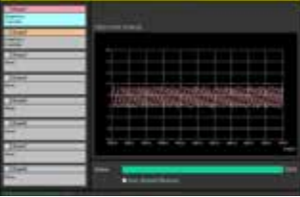

### ■ Manual

All Manuals can be viewed. Manuals can be added or deleted.



## Full Operator Support from Ease of Use to Reliability


### Smart Support

Processes using original Nakamura-Tome G-codes were registered as fixed forms. Programs can be easily created by inputting data through an interactive 3D guidance window.



### Digital Chuck Interlock

Set the Chuck Open and Close detection position easily. The chuck open/close position is set up on the NT NURSE screen. Setup time and machining cycle time are reduced.

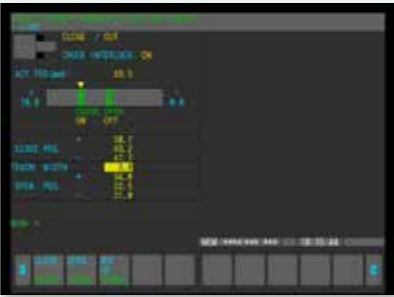

## NT Smart Sign

Nakamura-Tome IoT software

### ■ Monitoring




Real-Time Monitoring of machine running conditions, in addition to visualizing alarm history and past events.

### ■ Data Input/Output




Input and output programs, tool data and other machine data from the monitoring PC.

### ■ Diagnosis

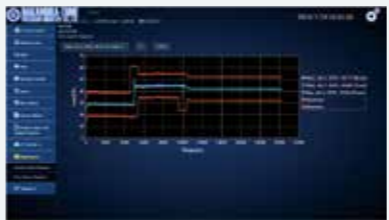

Diagnose problems with the machine servo drives and spindle drives, using a dedicated program.

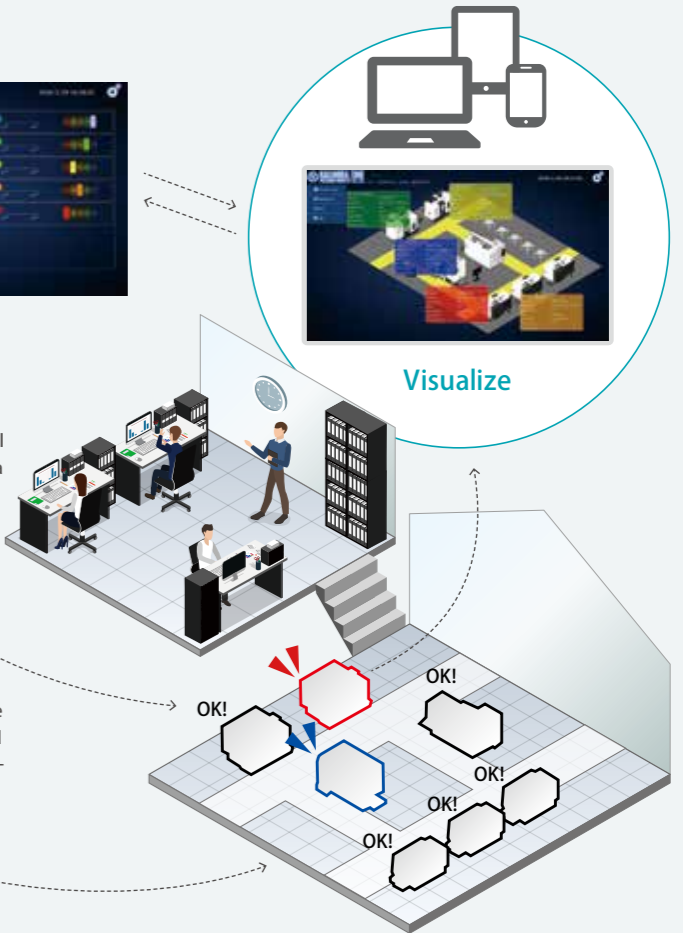

## NT Thermo Navigator AI

Thermal Growth  
Compensation using AI.

- ① Time
- ② Measured Dimensions
- ③ Retrieval of Wear Offset Data



Acquired Data  
analyzed with  
NT Thermo Navigator AI

Feedback

Compensation model  
built using  
AI machine learning.




### Powered by AI

Time and measured dimension data are input into a dedicated AI Learning software, to build an optimized thermal growth compensation model.



### High Precision Thermal Growth Compensation

The compensation value is calculated from acquired data. The more data is input, the more accurate is the compensation value.

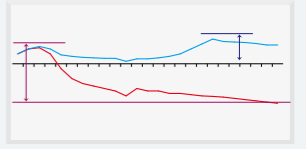

— Pre-correction thermal displacement data  
— Thermal displacement data after correction

Featuring Functions to Make Programs Faster and More Efficiently

Advanced NT NURSE

※Depending on machine specifications, some functions are not available.

All-in-one software!


NT Nurse is software that provides the operator with user-friendly support for operation, programming and production on the machine. Among vital features are phase recognition (a must for multitasking), direct chucking to prevent positioning error during transfer, and perfect synchronization of the left and right hand

spindles. Among other features, are the load monitor for detecting tool wear and tool breakage, tool life management, operation condition monitoring, in addition to many other features to simplify programming, set up, operation and production, all offered in one single package.

Useful functions



Tool Counter

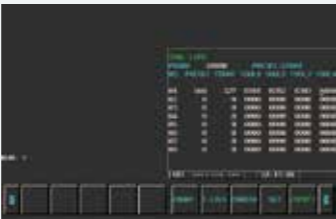

Tool Life



Operation Condition of each Tool



Energy Saving

\* The screen image is from NT SmartX

Airbag (Overload detection)

When the machine collides, there is no reason to panic.

The Airbag (Overload detection) of the machine tool significantly reduces the impact of a collision and protects the machine.



Without Airbag  
Machines will not stop immediately. The slide continues to move even after a collision.

With Airbag  
Retraction within 0.001 sec  
Crash? Within one millisecond after a collision, the servo motor direction is reversed, and the machine stops in EMG mode.

Barrier?  
Even with barrier function, machine collisions may occur.



▲Video



\* It is not a function that guarantees the prevention of machine break. This function does not eliminate the impact on the machine.




No fixtures required

NT WORK NAVIGATOR

Machining parts with non-round shapes, such as forgings or castings require that the raw part coordinates be recognized by the CNC control. It works just by touching the part with a simple inexpensive probe (mostly a round bar mounted on a tool holder) and using the torque control feature of the servo-motor, which is to record required coordinates in the CNC. The NT WORK NAVIGATOR is eliminating the need for positioning fixtures and special clamping devices.

NT Manual Guide i (LUCK-BEI II)

A programming guidance system with the ability to generate NC programs (ISO/EIA G-code programs) easily. Processes created in conversational mode can be cut, copied or pasted ensuring flexibility. Additionally, several cycles such as part-transfer cycle, requiring waiting M-codes, are readily made with the "NC program editing support function". The "NC program simulation function" can be used to check created- programs by tool-path simulation or solid-model animation.

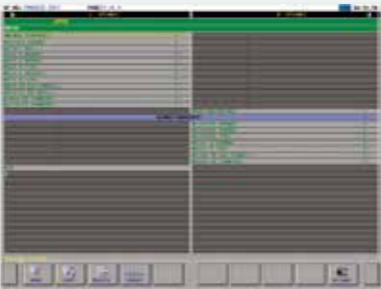

▲Process Editing Function  
NT Manual Guide i automatically recognizes each process and lists all processes. Operator can easily change and optimize the program by moving processes, copying processes or adding waiting-functions.




▲Fixed-form sentence function  
NT Manual Guide i contains more than 300 types of fixed form sentences. Operator can select these fixed form sentences for the program from a menu screen.




▲Simulation  
Accurate simulation of turning and milling operations using a 3D solid model.

By introducing the "automatic cutting condition setting function", the number of key strokes required to make a program were reduced by 50% reduced, compared with the previous NT Manual Guide version.

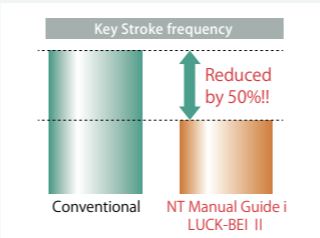

Automatic Cutting-Condition Setting Function

By setting the material type and required surface roughness, cutting conditions are automatically generated. These can be also changed depending on customer's experience.

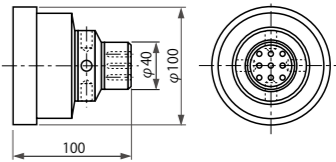

By selecting the material, cutting conditions are automatically input.




By setting the surface roughness, machining conditions are automatically input



Cutting conditions. End mill


Torque / Output Chart

L-spindle motor 15/11kW

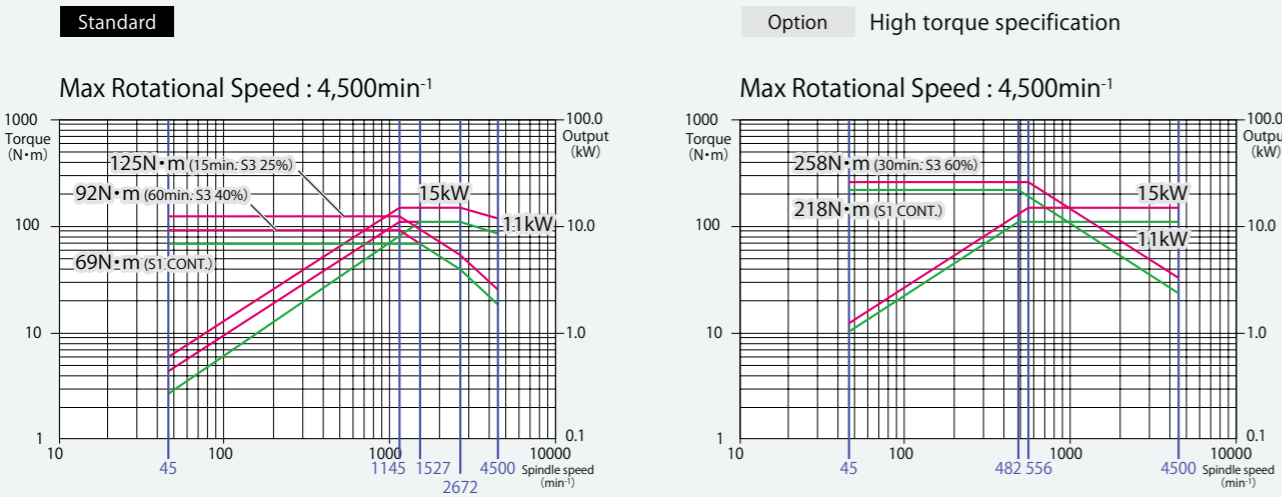

Machine Dimensions



AS-200

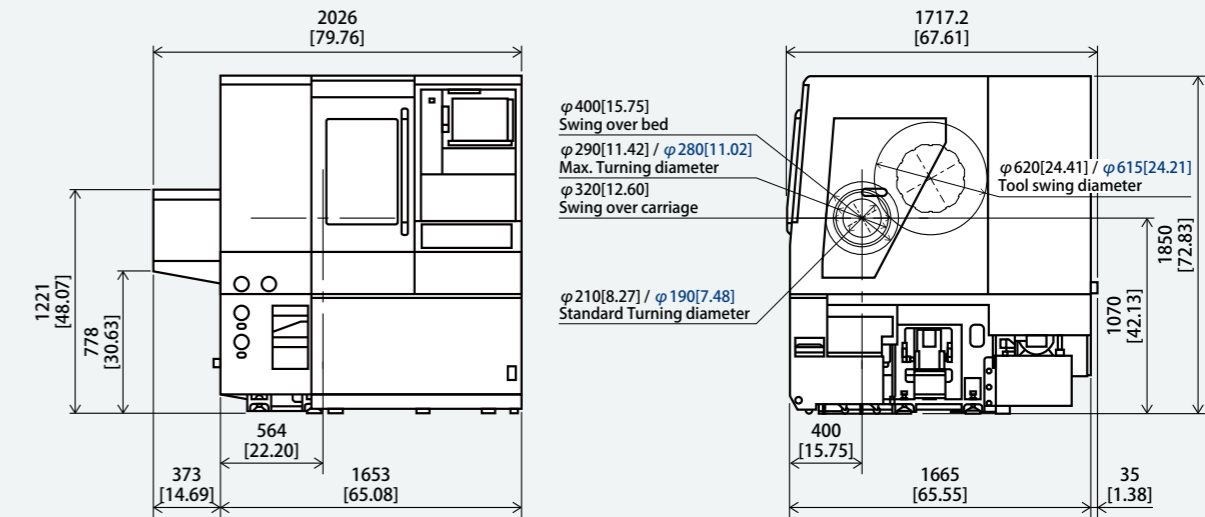

\*The dimensions given here may change depending on machine specifications.

12st/15st mm[inch]

AS-200L

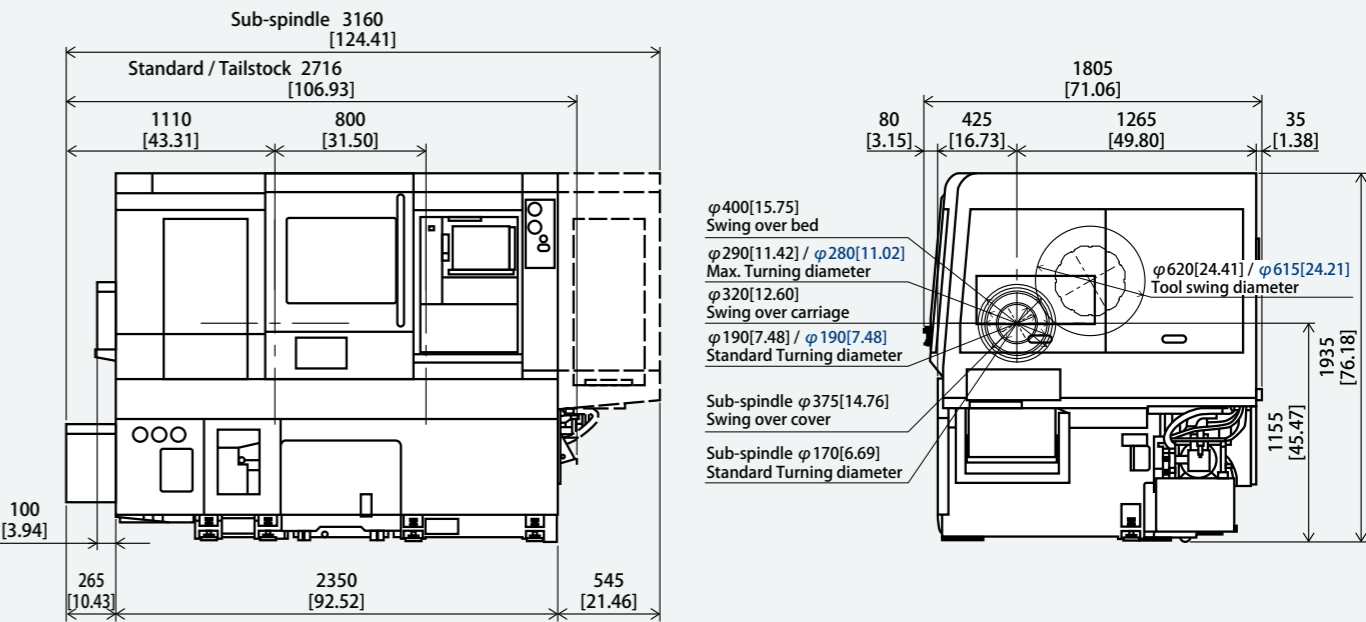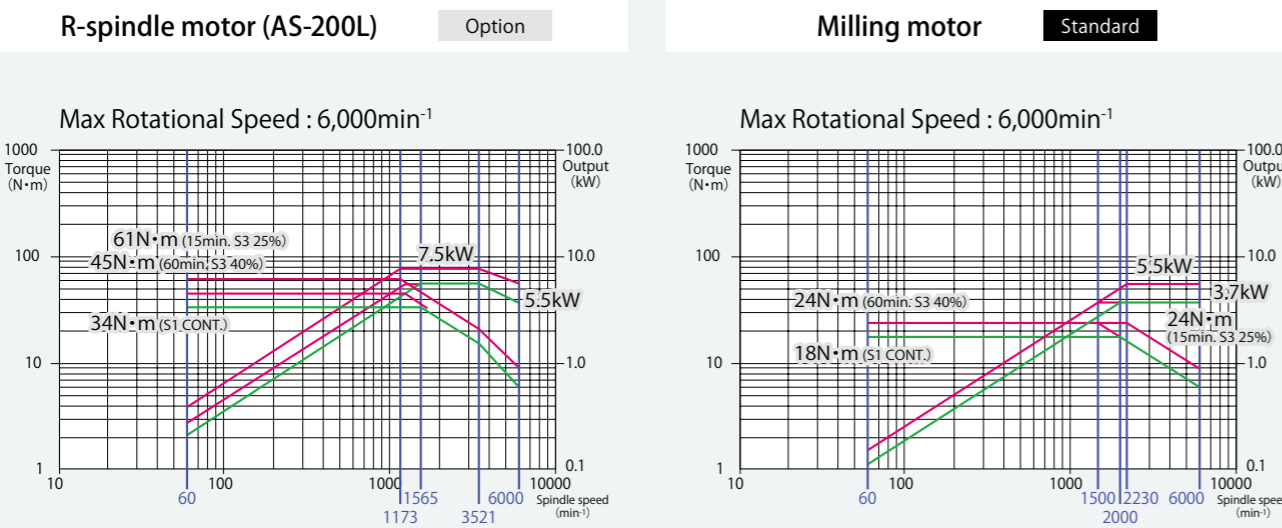


\*The dimensions given here may change depending on machine specifications.

12st/15st mm[inch]


AS-200

Standard / Tailstock Specifications

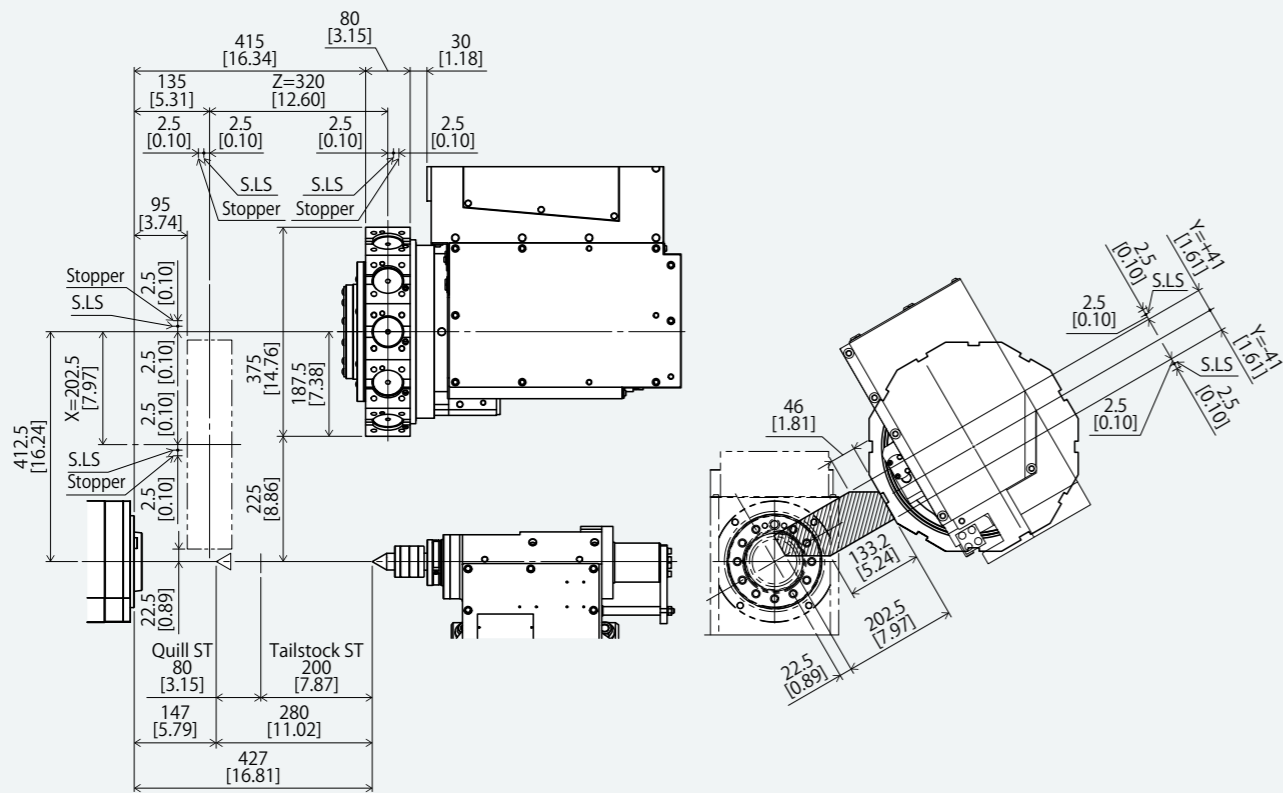


AS-200L


Standard / Tailstock Specification

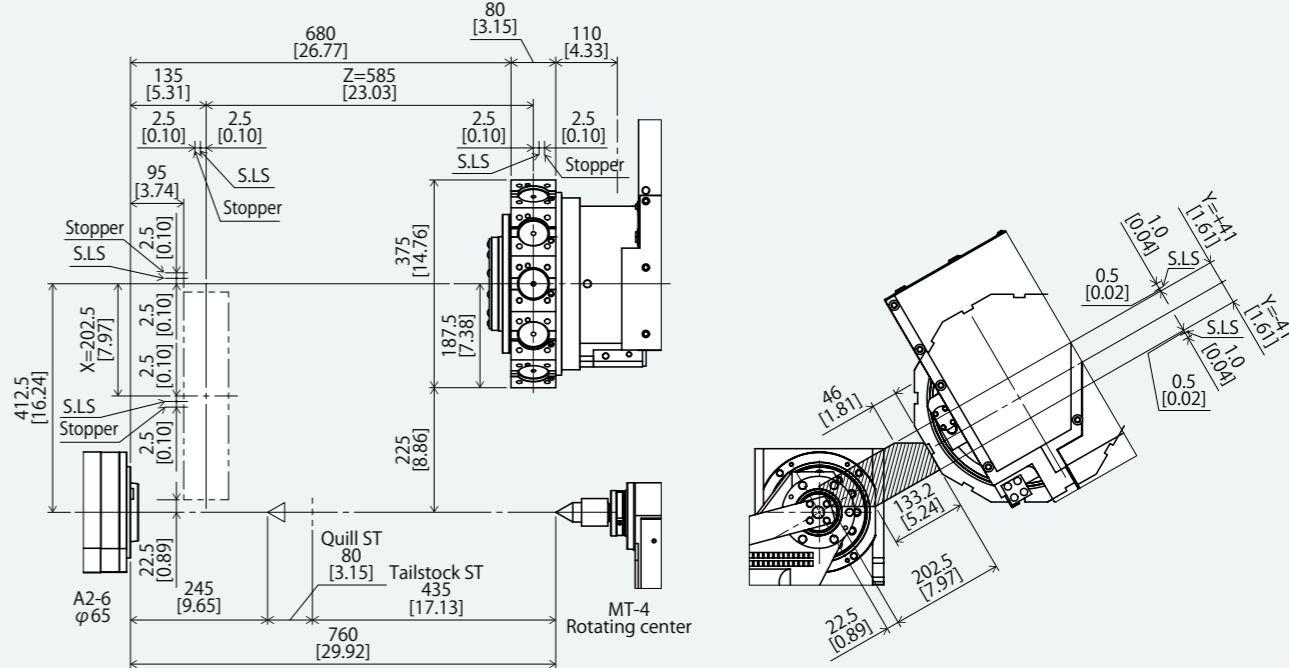

Sub-Spindle Specifications

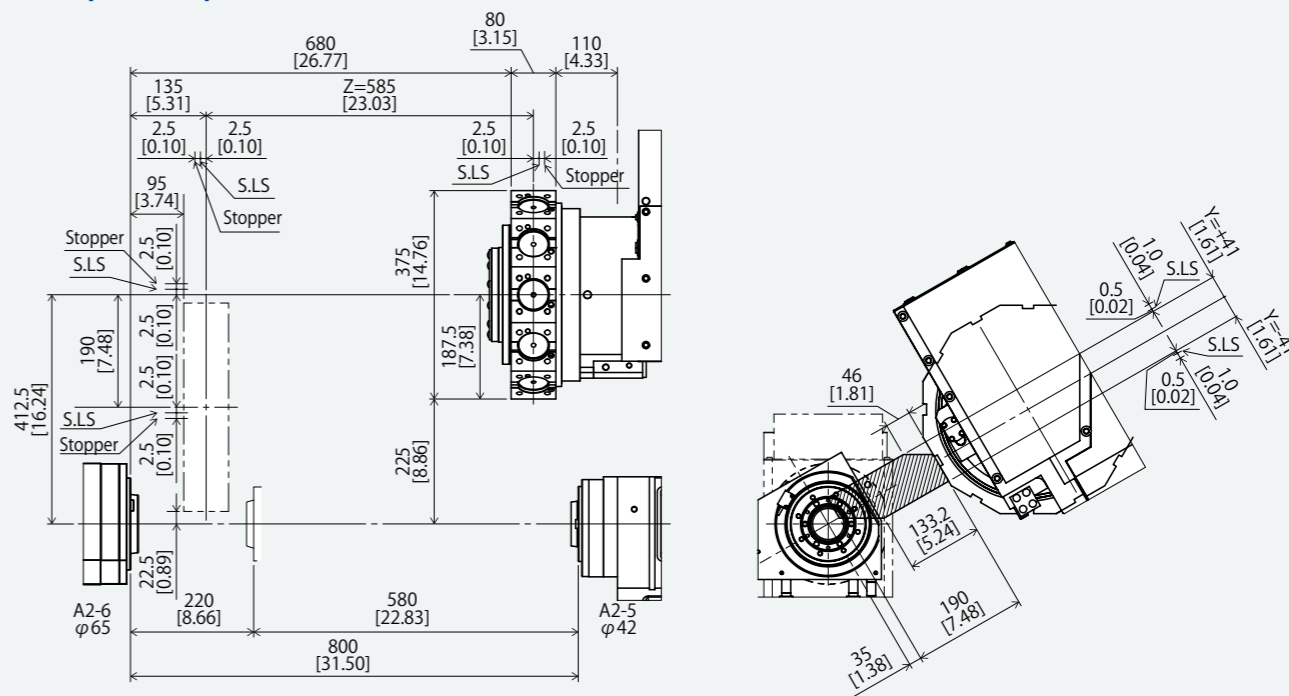


## AS-200



\* For turning parts having the Max. Turning Diameter, use turning holder (AS) B1031251-01[B1032251-01] and set the tool overhang length to 35 mm.

※This is 24 St. holder.  
It cannot be used on 15 St. turret.



AS-200

■ Capacity		12/24 stations turret	15 stations turret
Max swing bed		400mm	
Max. turning diameter		290mm	280mm
Distance between centers	Tailstock	427mm	
Max. turning length		300mm	
Bar capacity		65mm / 71mm (op.)	
Chuck size		8"	
■ Axis travel / Rapid feed			
X-Axis slide travel / X-Axis rapid feed rate		202.5mm / 24m/min	212.5mm / 24m/min
Z-Axis slide travel / Z-Axis rapid feed rate		320mm / 36m/min	
Y-Axis slide travel / Y-Axis rapid feed rate		±41mm / 6m/min	
■ Main spindle			
Spindle speed		4,500min <sup>-1</sup>	
Spindle speed range		Stepless	
Spindle nose		A2-6	
Hole through spindle		80mm	
I.D. of front bearing		110mm	
Hole through draw tube		66mm / 72mm (op.)	
■ Turret			
Type of turret head		Dodecagonal drum turret	15 stations turret
Number of Tool stations		12 (Max.24)	15
Number of Indexing positions		24	15
Tool size (square shank)		□20mm, □25mm	
Tool size (round shank)		φ32mm	
■ Milling			
Rotary system		Individual rotation	
Milling spindle speed		6,000min <sup>-1</sup>	
Spindle speed range		Stepless	
Number of milling stations		12	15
Tool size		Straight holder φ1mm ~ φ16mm Cross holder φ1mm ~ φ16mm	
■ Tailstock (op.)			
Driving System		Manual	
Quill diameter		φ70mm	
Quill taper		MT-4 (Rotating center)	
Quill stroke		80mm	
Travel		200mm	
■ Drive motor			
Main spindle	Standard	15/11kW 125/69N·m	
	Option	15/11kW(High torque) 258/218N·m	
Sub spindle (op.)		-	
Milling		5.5/3.7kW	
■ General			
Machine height		1,852mm	
Floor space(L × W)		1,655mm ×1,665mm	
Machine weight		4,500kg	
Power supply		19.8kVA	

■ Items

Control Type	Nakamura-Tome FANUC (0i-TF Plus)	
■ Controlled axes		
Controlled axes	Standard	4 axes
Simultaneously Controlled axes	Standard	4 axes(X, Z, C, Y axis)
■ Input command		
Least input increment	0.001mm/0.0001inch (X in diameter), 0.001°	
Least command increment	Standard	X : 0.0005mm / Z,Y : 0.001mm / C : 0.001°
Max. programmable dimension	±999999.999mm / ±39370.0787in , ±999999.999°	
Absolute/ Incremental programming	Standard	X, Z, Y, C / U, W, V, H
Decimal input	Standard	
Inch / Metric conversion	G20 / G21	
Programmable data input	G10	
■ Feed function		
Cutting feed	feed/min	
	X, Z :	1 ~ 8000mm/min, 0.01 ~ 314inch/min (1 ~ 4800mm/min, 0.01 ~ 188inch/min)
	Y :	1 ~ 6000mm/min, 0.01 ~ 236inch/min (1 ~ 4800mm/min, 0.01 ~ 188inch/min)
	C :	1 ~ 4800° /min
	feed / rev	0.0001 ~ 500.0000mm/rev 0.000001 ~ 9.999999inch/rev)
	The maximum cutting feed rate is the value in AI contour control mode. In normal operation, It is enabled with G316 command. The values in parentheses are normal values.	
Dwell	G04	
Feed per minute / Feed per revolution	G98 / G99	
Thread cutting	G32F designation	
Thread cutting retract	Standard	
Continuous thread cutting	Standard	
Handle feed	Manual pulse generator 0.001/0.01/0.1mm(per pulse)	
Automatic acceleration / deceleration	Standard	
Linear accel./ decel. after cutting feed interpolation	Standard	
Rapid feed override	Low/25/50/100% (can be set from 0~100 in 10% intervals on NT Setting screen)	
Cutting feedrate override	0 ~ 150%, 10%(each 10%)	
AI contouring control I	G5.1	
Spindle override	50%~ 120% Set every 10%	

● Safety quality specifications

Various interlocks, such as safety fences, auto extinguisher devices, and other safety-related equipment may be required. These have to be selected during the configuration of the machine.

① Safety devices include electromagnetic door lock, chuck interlock, hydraulic pressure switch, air pressure switch, short circuit breaker and quill interlock. (Door interlock and chuck interlock are standard equipment.)

② In the case of automation, various safety fences may be required, such as work stocker safety fences, robot safety fences, ...etc.

During the configuration of machine specifications, please discuss these requirements with the Nakamura-Tome machine sales representative.

■ Program memory		
Part program storage length/ Number of registerable programs	2Mbyte Total 5120m	1000
Parts program editing	delete, insert, change	
Program number search	Standard	
Sequence number search	Standard	
Address search	Standard	
Program storage memory	Battery backup	
Background editing	Standard	
DNC operation through memory card	Standard (Not including memory card)	
Extended part program editing	Standard	

■ Operation and display

Operation panel : Display	15-inch color LCD touch panel
Operation panel : Keyboard	Separate type MDI unit (QWERTY keyboard)

■ Programming assist functions

Circular interpolation R programming	Standard
Direct drawing dimension programming or Chamfering/Corner R	Standard
Canned cycles	G90, G92, G94
Multiple repetitive canned cycles	G70 ~ G76
Multiple repetitive canned cycles II	G71, G72
Canned cycles for drilling	G80 ~ G89
Sub program	Standard
Custom macro	Standard (common variables #100 - #149, #500 - #549)
Additional customer macro variables	Standard (After addition, #100 - #199, #500 - #999)
Abnormal load detection function	Standard
NT Work Navigator	Standard(not including contact bar)
NT NURSE	Standard

■ Machine support functions

Rigid tapping	Standard
Spindle orientation	Standard

■ ECO functions

Servo motor power off	Standard(Switch on Power Saving Mode in NT Setting screen)
Control of motor output during acceleration and deceleration	Standard(Switch on Power Saving Mode in NT Setting screen)
G code for servo motor energy-saving during acceleration and deceleration	G356/G357
Automatic light off	Standard(Switch on Power Saving Mode in NT Setting screen)
Automatic monitor off	Standard(Switch on Power Saving Mode in NT Setting screen)

● Precautions on the use of cutting fluids and lubricating oils

◦ Some types of cutting fluids (coolant) are harmful to machine components, causing damages such as peeling of paint, cracking of resin, expanding of rubber, corrosion and rust build up on aluminum and copper. To avoid causing damage to the machine, never use synthetic coolants, or any coolants containing chlorine. In addition, never use coolants and lubricating oils which contain organic solvents such as butane, pentane, hexane and octane.

AS-200L

■ Capacity		12/24 stations turret	15 stations turret
Max swing bed		400mm	
Max. turning diameter		290mm	280mm
Distance between centers	Tailstock	760mm	
Distance between spindles	Sub spindle	800mm	
Max. turning length		570mm	
Bar capacity		65mm / 71mm (op.)	
Chuck size		8"	
■ Axis travel / Rapid feed			
X-Axis slide travel / X-Axis rapid feed rate		202.5mm (Sub spindle:190mm) / 24m/min	212.5mm (Sub spindle:200mm) / 24m/min
Z-Axis slide travel / Z-Axis rapid feed rate		585mm / 36m/min	
Y-Axis slide travel / Y-Axis rapid feed rate		±41mm / 6m/min	
■ Main spindle			
Spindle speed		4,500min <sup>-1</sup>	
Spindle speed range		Stepless	
Spindle nose		A2-6	
Hole through spindle		80mm	
I.D. of front bearing		110mm	
Hole through draw tube		66mm / 72mm (op.)	
■ Turret			
Type of turret head		Dodecagonal drum turret	15 stations turret
Number of Tool stations		12 (Max.24)	15
Number of Indexing positions		24	15
Tool size (square shank)		□20mm, □25mm	
Tool size (round shank)		φ32mm	
■ Milling			
Rotary system		Individual rotation	
Milling spindle speed		6,000min <sup>-1</sup>	
Spindle speed range		Stepless	
Number of milling stations		12	15
Tool size		Straight holder φ1mm ~φ16mm Cross holder φ1mm ~φ16mm	
■ Tailstock (op.)			
Driving System		Manual	
Quill diameter		φ80mm	
Quill taper		MT-4 (Rotating center)	
Quill stroke		80mm	
Travel		435mm	
■ Sub spindle (op.)			
Spindle speed		6,000min <sup>-1</sup>	
Spindle speed range		Stepless	
Spindle nose		A2-5	
Hole through spindle		56mm	
I.D. of front bearing		80mm	
Hole through draw tube		43mm	
■ Drive motor			
Main spindle	Standard	15/11kW 125/69N·m	
	Option	15/11kW(High torque) 258/218N·m	
Sub spindle (op.)		7.5/5.5kW	
Milling		5.5/3.7kW	
■ General			
Machine height		1,935mm	
Floor space(L × W)		2,716mm ×1,805mm (Standard)	
		3,160mm ×1,805mm (Sub spindle)	
Machine weight		5,500kg	
Power supply		19.8kVA (Standard) 23kVA(Sub spindle)	

■ Items

Control Type	Nakamura-Tome FANUC (0i-TF Plus)	
■ Controlled axes		
Controlled axes	Standard	4 axes
	Sub spindle	6 axes
Simultaneously	Standard	4 axes(X, Z, C, Y axis)
Controlled axes	Sub-spindle	4 axes(X, Z, C(C2), Y, B axis)
■ Input command		
Least input increment	0.001mm/0.0001inch (X in diameter), 0.001°	
Least command increment	Standard	X : 0.0005mm / Z,Y : 0.001mm / C : 0.001°
	Sub-spindle	X : 0.0005mm / Z,Y : 0.001mm / C : 0.001° / B : 0.001mm
Max. programmable dimension	±999999.999mm / ±39370.0787in , ±999999.999°	
Absolute/ Incremental programming	Standard	X, Z, Y, C / U, W, V, H
	Sub-spindle	X, Z, Y, C, B(absolute only for B) / U, W, V, H
Decimal input	Standard	
Inch / Metric conversion	G20 / G21	
Programmable data input	G10	
■ Feed function		
Cutting feed	feed/min	
	X, Z: 1 ~ 8000mm/min, 0.01 ~ 314inch/min (1 ~ 4800mm/min, 0.01 ~ 188inch/min)	
	Y: 1 ~ 6000mm/min, 0.01 ~ 236inch/min (1 ~ 4800mm/min, 0.01 ~ 188inch/min)	
	C: 1 ~ 4800° /min	
	B(op.): 1 ~ 8000mm/min, 0.01 ~ 314inch/min (1 ~ 4800mm/min, 0.01 ~ 188inch/min)	
	feed / rev 0.0001 ~ 500.0000mm/rev 0.000001 ~ 9.999999inch/rev)	
The maximum cutting feed rate is the value in AI contour control mode. In normal operation, It is enabled with G316 command. The values in parentheses are normal values.		
Dwell	G04	
Feed per minute / Feed per revolution	G98 / G99	
Thread cutting	G32F designation	
Thread cutting retract	Standard	
Continuous thread cutting	Standard	
Handle feed	Manual pulse generator 0.001/0.01/0.1mm(per pulse)	
Automatic acceleration / deceleration	Standard	
Linear accel./ decel. after cutting feed interpolation	Standard	
Rapid feed override	Low/25/50/100% (can be set from 0~100 in 10% intervals on NT Setting screen)	
Cutting feedrate override	0 ~ 150%, 10%(each 10%)	
AI contouring control I	G5.1	
Spindle override	50%~ 120% Set every 10%	

● Safety quality specifications

Various interlocks, such as safety fences, auto extinguisher devices, and other safety-related equipment may be required. These have to be selected during the configuration of the machine.

① Safety devices include electromagnetic door lock, chuck interlock, hydraulic pressure switch, air pressure switch, short circuit breaker and quill interlock. (Door interlock and chuck interlock are standard equipment.)

② In the case of automation, various safety fences may be required, such as work stocker safety fences, robot safety fences, ...etc.

During the configuration of machine specifications, please discuss these requirements with the Nakamura-Tome machine sales representative.

■ Program memory		
Part program storage length/ Number of registerable programs	2Mbyte Total 5120m	1000
Parts program editing	delete, insert, change	
Program number search	Standard	
Sequence number search	Standard	
Address search	Standard	
Program storage memory	Battery backup	
Background editing	Standard	
DNC operation through memory card	Standard (Not including memory card)	
Extended part program editing	Standard	

■ Operation and display	
Operation panel : Display	15-inch color LCD touch panel
Operation panel : Keyboard	Separate type MDI unit (QWERTY keyboard)

■ Programming assist functions	
Circular interpolation R programming	Standard
Direct drawing dimension programming or Chamfering/Corner R	Standard
Canned cycles	G90, G92, G94
Multiple repetitive canned cycles	G70 ~ G76
Multiple repetitive canned cycles II	G71, G72
Canned cycles for drilling	G80 ~ G89
Sub program	Standard
Custom macro	Standard (common variables #100 - #149, #500 - #549)
Additional customer macro variables	Standard (After addition, #100 - #199, #500 - #999)
Abnormal load detection function	Standard
NT Work Navigator	Standard(not including contact bar)
NT NURSE	Standard

■ Machine support functions	
Rigid tapping	Standard
Spindle synchronised control	Option (Sub-spindle)
C axis synchronised control	Option (Sub-spindle)
Spindle orientation	Standard

■ ECO functions	
Servo motor power off	Standard(Switch on Power Saving Mode in NT Setting screen)
Control of motor output during acceleration and deceleration	Standard(Switch on Power Saving Mode in NT Setting screen)
G code for servo motor energy-saving during acceleration and deceleration	G356/G357
Automatic light off	Standard(Switch on Power Saving Mode in NT Setting screen)
Automatic monitor off	Standard(Switch on Power Saving Mode in NT Setting screen)

● Precautions on the use of cutting fluids and lubricating oils

○ Some types of cutting fluids (coolant) are harmful to machine components, causing damages such as peeling of paint, cracking of resin, expanding of rubber, corrosion and rust build up on aluminum and copper.

To avoid causing damage to the machine, never use synthetic coolants, or any coolants containing chlorine. In addition, never use coolants and lubricating oils which contain organic solvents such as butane, pentane, hexane and octane



<https://www.nakamura-tome.com>



Netsuno 15, Hakusan city, Ishikawa, 920-2195 Japan  
Phone : +81 76 273 8100 Fax : +81 76 273 4312

\* This catalog was published in February 2025.  
Specifications, illustrations and data given  
herein are subject to change without notice.

\* The products in this catalog are controlled by  
Japan's "Foreign Exchange and Foreign Trade  
Law". The export of the products is subject  
to an export license to be issued by the  
Japanese government.